

Ball vibrator type K10 EX

CE EX II 2 G/D c T6 T85°C

Description:

Ball vibrators, simple and good. Wide range for many applications.

ACBMV B. CASADIO VIBRATION

Z.I. Mi-Plaine

51 Rue Ampère

B.P. 31

69682 CHASSIEU CEDEX (FRANCE)

Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88

Email: vibrateur@orange.fr

Internet: acbm.com

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	22500	28000	34000
Force (N)	250	470	710
Force (LBS)	56,31	105,86	159,91
Air cons. (l/min)	92	150	200
Air cons. (CF)	3,29	5,36	7,14

Typical applications:

- Emptying of bunkers
- Screen filters
- Vibrating tables
- Preventing adhesions in pipelines and silos
- Movement of goods

Construction:


- Vibration by means of a ball that is passed through hardened-steel guides.
- Nylon plates on both sides to support the ball and as a protection from dust and water.
- Housing with 4 mounting bores, depending on the application.

Properties:


- Powerful
- Rated frequency 22500 – 34000 RPM
- Centrifugal force 250 – 710 N
- Continuously variable (compressed air)
- Can be used at up to 100°C
- 150 °C on request

Design:

- 1 Housing made from extruded aluminium alloy
- 2 Hardened guides made of steel
- 3 Nylon end plates
- 4 Hardened ball
- 5 Air inlet
- 6 Air outlet
- 7 Base mounting bores
- 8 Sideways fitting bores

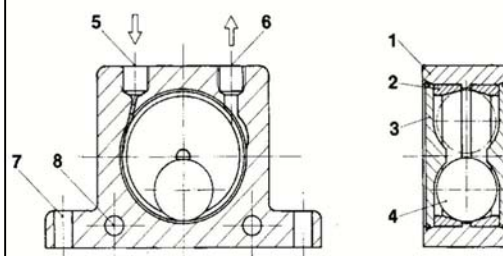

DIMENSIONAL SPECIFICATIONS

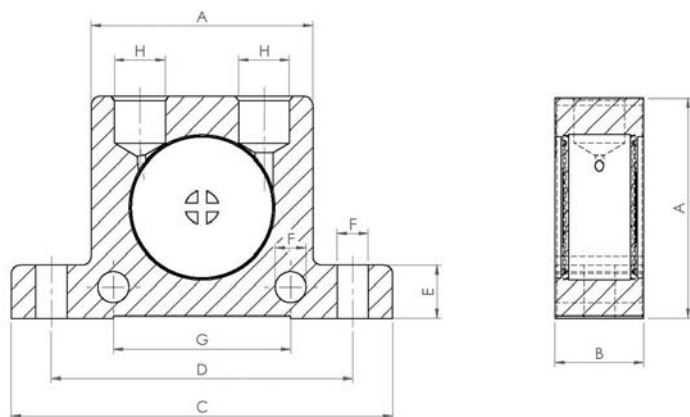

	mm	inch
A	50	1,97
B	20	0,79
C	86	3,39
D	68	2,68
E	12	0,47
F	7	0,28
G	40	40
H	G 1/4"	G 1/4"
	kg	LBS
Vibrator weight	0,13	0,289