

### External piston vibratortype VTL855

ACBMV B. CASADIO VIBRATION  
 Z.I. Mi-Plaine  
 51 Rue Ampère  
 B.P. 31  
 69682 CHASSIEU CEDEX (FRANCE)  
 Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88  
 Email: [vibrateur@orange.fr](mailto:vibrateur@orange.fr)  
 Internet: [acbm.com](http://acbm.com)

**Description:**  
 Pneumatic piston vibrators for linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

#### VIBRATING AND PNEUMATIC CARACTERISTICS

	2 Bars/29 PSI	0,00	6 Bars/87 PSI
Frequency (strike/min)	1800		2600
Force (N)	700		1530
Force (LBS)	157,66	0,00	344,59
Air cons. (l/min)	301		900
Air cons. (CF)	10,75	0,00	32,14

**Typical applications:**

- Foodstuffs and pharmaceuticals
- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

**Construction:**

- With a freely flying piston, the tapered end of which protrudes from the vibrator's housing.
- Its optimum power to weight ratio makes its employment in producing conveying impulses particularly efficient.

**Properties:**


- Quiet and efficient
- Nominal frequency 1800 – 2600 strikes/min
- Centrifugal force 700 – 1530 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Extremely low noise level



**Design:**

Housing made from hard-anodized aluminium alloy, steel or plastic  
 Piston made from leaded-bronze or steel  
 Threaded insert for mounting purposes

#### DIMENSIONAL SPECIFICATIONS

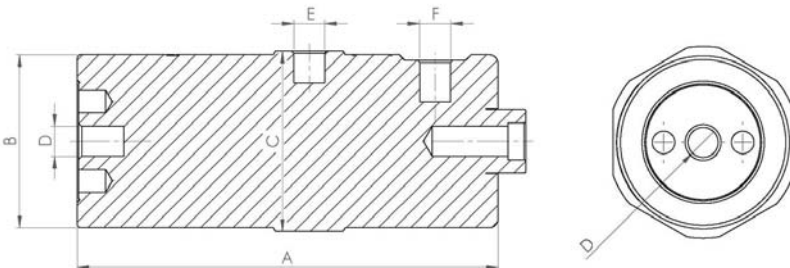

	mm	inch
A	122	4,81
B	160	6,30
C	160	6,30
D	M20	M20
E	G 3/8"	G 3/8"
F	G 3/8"	G 3/8"

	kg	LBS
Vibrator weight	16,91	37,578