

## Knocker vibrator type FKL150SI

ACBMV B. CASADIO VIBRATION  
Z.I. Mi-Plaine  
51 Rue Ampère  
B.P. 31  
69682 CHASSIEU CEDEX (FRANCE)  
Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88  
Email: [vibrateur@orange.fr](mailto:vibrateur@orange.fr)  
Internet: [acbm.com](http://acbm.com)

Description:  
For powerful impacts at low operating pressure.

### VIBRATING AND PNEUMATIC CHARACTERISTICS

	4,5 Bars/65,25 PSI	7 Bars/101,5 PSI	
Working/strike (Nm)	50	110	
Impulsion/strike (Ns)	1	28,5	
Air cons. (l/min)	1,2	1,7	
Air cons. (CF)	0,04	0,06	

#### Typical applications:

Wide range of uses, including in the open air, and in wet or explosion risk areas. For knocking off material adhesions on container walls, such as in silos, hoppers, filter outlets, reactors and pipelines.

#### Construction:


Compressed air pushes a piston against a spring. When air pressure is rapidly vented, the piston shoots against a baffle plate. Mechanical impact regulation is provided by limiting the piston's stroke by means of an inserted threaded rod. Knocker housing

#### Properties:


- Wide range of settings for impact power and interval
- Impact force can be set pneumatically and/or by mechanical means
- Flexible range of applications

#### Design:

Housing made of hard-anodized aluminium alloy  
Steel piston  
Baffle plate made of impact-resistant plastic



### DIMENSIONAL SPECIFICATIONS

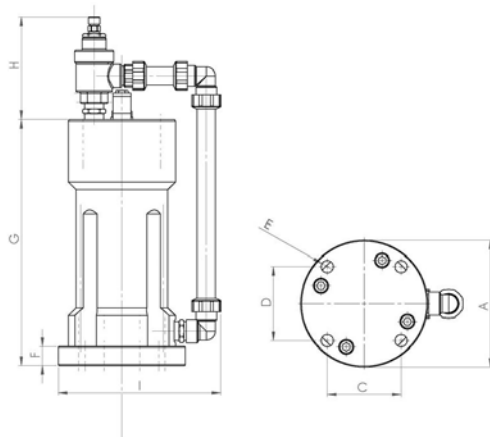

	mm	inch
A	140	5,52
B	140	5,52
C	81,5	3,21
D	81,5	3,21
E	13,5	0,53
F	21	0,83
G	271	10,68
H	113	4,45
I	179	7,05
	kg	LBS
Vibrator weight	9,5	21,11