

ACBMV B. CASADIO VIBRATION
Z.I. Mi-Plaine
51 Rue Ampère
B.P. 31
69682 CHASSIEU CEDEX (FRANCE)
Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88
Email: vibrateur@orange.fr
Internet: acbm.com

4 POLES - 1800 RPM ATEX II 2D tD A21 IP 66 ZONE 21-22
REF.: 601226C Dust T°=150°C
SIZE: 50

Certifications:



MECHANICAL AND ELECTRICAL SPECIFICATIONS

Eccentric weight setup (%)			Centrifugal force (kg)	Centrifugal force (kN)	Estimated bearings life time (hours)
100			1500	14,7	33552
90			1350	13,23	47670
80			1200	11,76	70591
70			1050	10,29	>100000
60			900	8,82	>100000
50			750	7,35	>100000
40			600	5,88	>100000
30			450	4,41	>100000
20			300	2,94	>100000
10			150	1,47	>100000

Power supply (volts)	460
Phases:	three phases
Frequency (Hz)	60 Hz
Rotation speed (RPM)	1800
Max input power (watt)	1200
Max current (amp)	2
IS/IR	4,5

DIMENSIONAL SPECIFICATIONS (mm)

Vibrator weight: 41,5 kg

Continual service ambient temperature: -20°C à +40°C - Tropicalization anti-mold - Mechanical protection: IP66 IK08 according to IEC

Bearing type: ROLLER


Lubrication LONG-LIFE with KLUEBER STABURAGS NBU 8EP.

Re lubrication quantity after 1000 hours of using: 30g

Max quantity by replaced bearing: 16g

Fixing with 6 screws M16 - 5/8" quality 8.8 with tightening torque (kgm - ft/lb): 19 - 137

Power supply cable size: 12.5 à 15 mm - Cable entry thread: M25x1,5

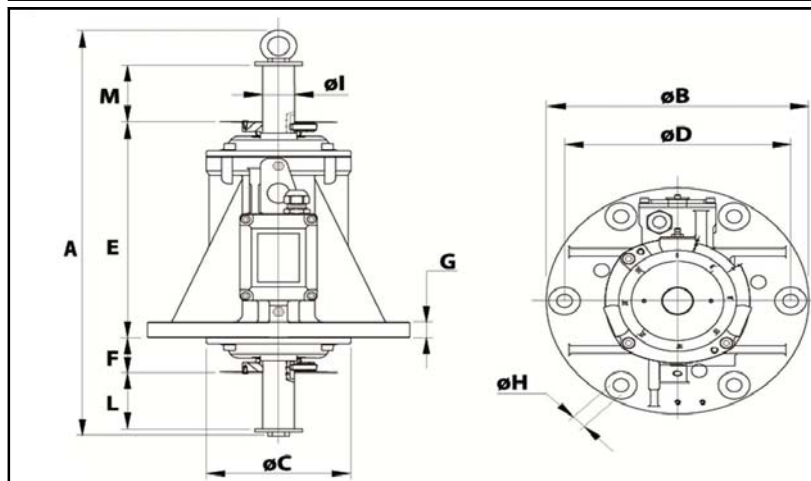

A	476
B	290
C	171
D	250
E	278
F	46
G	20
N° HOLES	6
H	17
I	35
L	71
M	71