

Internal piston vibratortype FP18L EX

CE EX II 2 G/D c T6 T85°C

Description:

Pneumatic piston vibrators for linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

ACBMV B. CASADIO VIBRATION

Z.I. Mi-Plaine

51 Rue Ampère

B.P. 31

69682 CHASSIEU CEDEX (FRANCE)

Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88

Email: vibrateur@orange.fr

Internet: acbm.com

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	3100	4000	4600
Force (N)	64	150	206
Force (LBS)	14,41	33,78	46,40
Air cons. (l/min)	5	23	46
Air cons. (CF)	0,18	0,82	1,64

Typical applications:

- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

Construction:

Aluminium housing surface-hardened and corrosion-resistant

Properties:


- Quiet and efficient
- Nominal frequency 3100 – 4600 strikes/min
- Centrifugal force 64 – 206 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level

Design:

Housing made from hard-anodized aluminium alloy
Piston made from leaded-bronze
Steel spring starting device
Sound-absorbing air outlet system
Hard anodized aluminium base
Threaded insert for mounting purposes



DIMENSIONAL SPECIFICATIONS

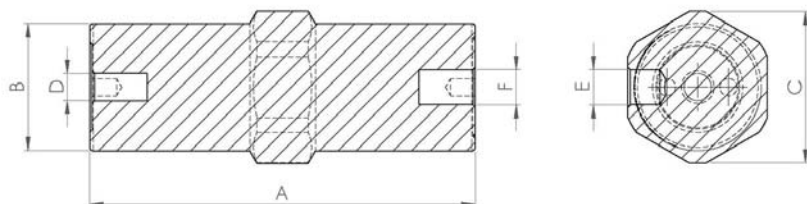

	mm	inch
A	109	4,29
B	40	1,58
C	45	1,77
D	M10	M10
E	G 1/8"	G 1/8"
F	G 1/8"	G 1/8"
	kg	LBS
Vibrator weight	0,41	0,911
Housing weight	0,3	0,667
Piston weight	0,11	0,244