

Internal piston vibratortype FP35S EX

CE EX II 2 G/D c T6 T85°C

Description:

Pneumatic piston vibrators for linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

ACBMV B. CASADIO VIBRATION

Z.I. Mi-Plaine

51 Rue Ampère

B.P. 31

69682 CHASSIEU CEDEX (FRANCE)

Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88

Email: vibrateur@orange.fr

Internet: acbm.com

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	3800	4700	5800
Force (N)	294	668	1038
Force (LBS)	66,22	150,45	233,78
Air cons. (l/min)	23	101	162
Air cons. (CF)	0,82	3,61	5,79

Typical applications:

- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

Construction:

Aluminium housing surface-hardened and corrosion-resistant

Properties:


- Quiet and efficient
- Nominal frequency 3800 – 5800 strikes/min
- Centrifugal force 294 – 1038 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level

Design:

Housing made from hard-anodized aluminium alloy
Piston made from leaded-bronze
Steel spring starting device
Sound-absorbing air outlet system
Hard anodized aluminium base
Threaded insert for mounting purposes



DIMENSIONAL SPECIFICATIONS

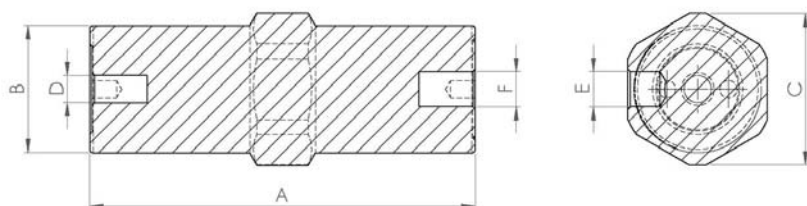

	mm	inch
A	98	3,86
B	58	2,29
C	69	2,72
D	M12	M12
E	G 1/4"	G 1/4"
F	G 1/4"	G 1/4"
	kg	LBS
Vibrator weight	0,845	1,878
Housing weight	0,53	1,178
Piston weight	0,315	0,700