

## Internal piston vibratortype FP50M EX

CE EX II 2 G/D c T6 T85°C

### Description:

Pneumatic piston vibrators for linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

ACBMV B. CASADIO VIBRATION  
Z.I. Mi-Plaine  
51 Rue Ampère  
B.P. 31  
69682 CHASSIEU CEDEX (FRANCE)  
Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88  
Email: [vibrateur@orange.fr](mailto:vibrateur@orange.fr)  
Internet: [acbm.com](http://acbm.com)

### VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	1850	2300	2800
Force (N)	490	970	1600
Force (LBS)	416,67	518,02	630,63
Air cons. (l/min)	48	120	192
Air cons. (CF)	1,71	4,29	6,86

### Typical applications:

- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

### Construction:

Aluminium housing surface-hardened and corrosion-resistant

### Properties:


- Quiet and efficient
- Nominal frequency 490 – 1600 strikes/min
- Centrifugal force 1850 – 2800 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level

### Design:

Housing made from hard-anodized aluminium alloy  
Piston made from leaded-bronze  
Steel spring starting device  
Sound-absorbing air outlet system  
Hard anodized aluminium base  
Threaded insert for mounting purposes



### DIMENSIONAL SPECIFICATIONS

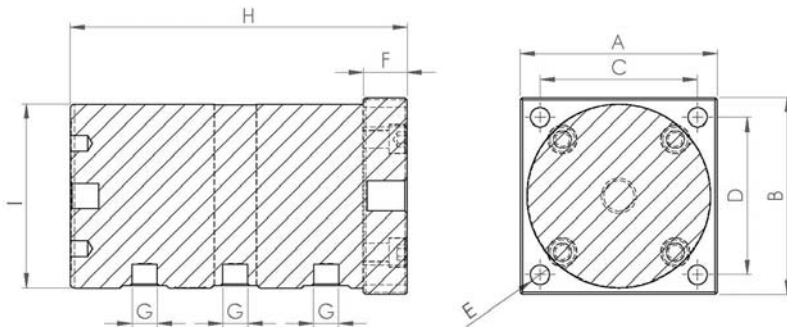

	mm	inch
A	90	3,55
B	90	3,55
C	72	2,84
D	72	2,84
E	8,8	0,35
F	20	0,79
G	G 1/4"	G 1/4"
H	G 1/4"	G 1/4"
I	G 1/4"	G 1/4"
J	G 1/4"	154
K	154	84
	kg	LBS
Vibrator weight	3,3	7,333
Housing weight	1350	3000
Piston weight	1500	3333