

Lubrication free internal piston vibratortype FPLF12L

ACBMV B. CASADIO VIBRATION
 Z.I. Mi-Plaine
 51 Rue Ampère
 B.P. 31
 69682 CHASSIEU CEDEX (FRANCE)
 Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88
 Email: vibrateur@orange.fr
 Internet: acbm.com

Description:
 Lubrication free pneumatic piston vibrators for a linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (strike/min)	4000	4800	5400
Force (N)	32	58	81
Force (LBS)	7,21	13,06	18,24
Air cons. (l/min)	1	3	20
Air cons. (CF)	0,04	0,11	0,71

Typical applications:

- Foodstuffs and pharmaceuticals
- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

Construction:

- Lubrication free operation possible.
- Extra hard and corrosion-resistant surface through aluminium oxide-generated by titaniferous electrolyte.
- Ideally suited for foodstuffs, drinks and pharmaceuticals.

Properties:


- Efficient
- Nominal frequency 4000 – 5400 strikes/min
- Centrifugal force 32 – 81 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level



Design:

Housing made from hard-anodized aluminium alloy
 Piston made from leaded-bronze
 Steel spring starting device
 Sound-absorbing air outlet system
 Hard anodized aluminium base
 Threaded insert for mounting purposes

DIMENSIONAL SPECIFICATIONS

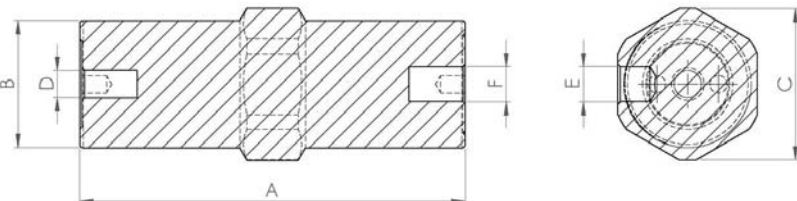

	mm	inch
A	94	3,70
B	94	3,70
C	34	1,34
D	M8	M8
E	G 1/8"	G 1/8"
F	G 1/8"	G 1/8"

	kg	LBS
Vibrator weight	0,155	0,344
Housing weight	0,165	0,367
Piston weight	0,04	0,089