

Lubrication free internal piston vibratortype FPLF35L EX

CE EX II 2 G/D c T6 T85°C

ACBMV B. CASADIO VIBRATION
 Z.I. Mi-Plaine
 51 Rue Ampère
 B.P. 31
 69682 CHASSIEU CEDEX (FRANCE)
 Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88
 Email: vibrateur@orange.fr
 Internet: acbmv.com

Description:

Lubrication free pneumatic piston vibrators for a linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	2400	3100	3600
Force (N)	282	680	1066
Force (LBS)	63,51	153,15	240,09
Air cons. (l/min)	38	89	135
Air cons. (CF)	1,36	3,18	4,82

Typical applications:

- Foodstuffs and pharmaceuticals
- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

Construction:

- Lubrication free operation possible.
- Extra hard and corrosion-resistant surface through aluminium oxide-generated by titaniferous electrolyte.
- Ideally suited for foodstuffs, drinks and pharmaceuticals.

Properties:


- Efficient
- Nominal frequency 2400 – 3600 strikes/min
- Centrifugal force 282 – 1066 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level

Design:

Housing made from hard-anodized aluminium alloy
 Piston made from leaded-bronze
 Steel spring starting device
 Sound-absorbing air outlet system
 Hard anodized aluminium base
 Threaded insert for mounting purposes



DIMENSIONAL SPECIFICATIONS

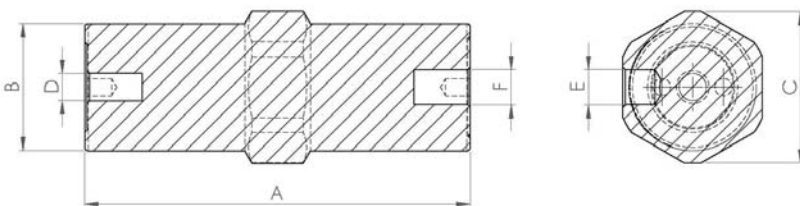

	mm	inch
A	136	5,36
B	136	5,36
C	65	2,56
D	M12	M12
E	G 1/4"	G 1/4"
F	G 1/4"	G 1/4"

	kg	LBS
Vibrator weight	1,28	2,844
Housing weight	0,7	1,556
Piston weight	0,58	1,289