

TECHNICAL DATA SHEET PNEUMATIC VIBRATOR

Internal piston vibratortype FP18M EX

CE EX II 2 G/D c T6 T85°C

Description:

Pneumatic piston vibrators for linear vibration with unlimited fine-tuning facilities for amplitude and frequency. Wide range.

ACBMV B. CASADIO VIBRATION
 Z.I. Mi-Plaine
 51 Rue Ampère
 B.P. 31
 69682 CHASSIEU CEDEX (FRANCE)
 Tel.: 04 78 90 87 87 / Fax.: 04 78 90 87 88
 Email: vibrateur@orange.fr
 Internet: acbm.com

VIBRATING AND PNEUMATIC CHARACTERISTICS

	2 Bars/29 PSI	4 Bars/58 PSI	6 Bars/87 PSI
Frequency (RPM)	4000	5000	5900
Force (N)	68	134	188
Force (LBS)	15,32	30,18	42,34
Air cons. (l/min)	4	28	52
Air cons. (CF)	0,14	1,00	1,86

Typical applications:

- Driving conveyor and discharge chutes
- Loosening or compacting of bulk materials
- Starting up of mechanical processes
- Filling facilities

Construction:

Aluminium housing surface-hardened and corrosion-resistant

Properties:


- Quiet and efficient
- Nominal frequency 4000 – 5900 strikes/min
- Centrifugal force 68 – 188 N
- Frequency and amplitude can be regulated
- Can be used at temperatures up to 150°C
- Resistant to extreme environmental conditions
- Extremely low noise level



Design:

- Housing made from hard-anodized aluminium alloy
- Piston made from leaded-bronze
- Steel spring starting device
- Sound-absorbing air outlet system
- Hard anodized aluminium base
- Threaded insert for mounting purposes

DIMENSIONAL SPECIFICATIONS

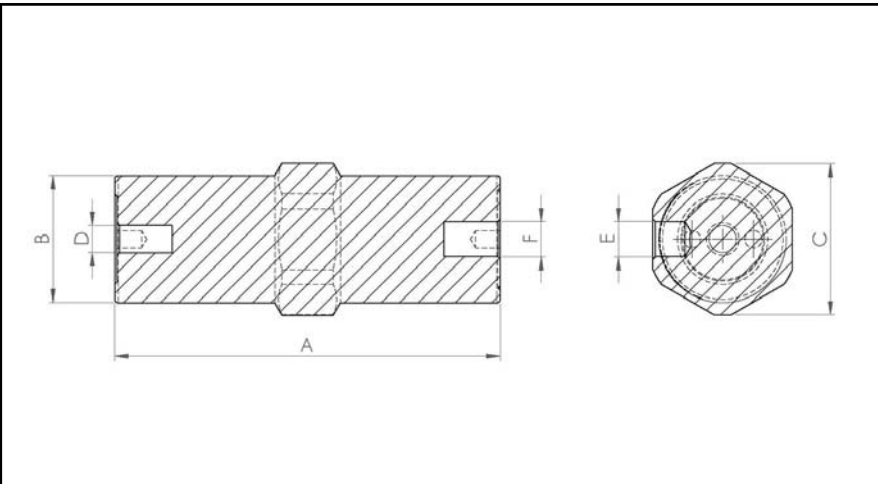

	mm	inch
A	94	3,70
B	40	1,58
C	45	1,77
D	M10	M10
E	G 1/8"	G 1/8"
F	G 1/8"	G 1/8"

	kg	LBS
Vibrator weight	0,34	0,756
Housing weight	0,26	0,578
Piston weight	0,08	0,178

This datas and outline drawings of this technical sheet are the property of ACBMV company. Don't reproduce or copy without authorization. This datas and outline drawings are intended to depict overall dimensions and do not necessarily represent the machine exterior. Information contained herein is subject to change without notice.